




Code	Motor Power		Coupling Dimensions								Max . Operation Dia.			Treated Diameter					
														Engine			Pump		
TYPE	KW	HP	L	A1	B	F	E	E1	C	G	D	H	T	D			M		
DK 14	0.25-0.38	0.35-0.5	50	40	32	24	24	24	28	2	14	5	16.5	14	PLO
DK 24	1.1-1.5	1.5-2	58	53	44	36	28	28	37	2	24	6	27	14	19	24	PLO-PL
DK 28	2.2-4	3-5.5	82	67	57	44	40	40	40	2	28	8	32	19	24	28	PLO-PL	PLA
DK 32	2.2-4	3-5.5	82	76	59	50	40	40	43	2	32	8	36	19	24	28	PL	PLA
DK38	5.5-7.5	7.5-10	86	84	68	58	42	42	47	2	38	10	42	19	24	28	38	PL	PLA
DK42	11-15	15-20	86	88	72	60	42	42	47	2	42	12	47	24	28	38	42	PL	PLA
DK 48	18.5-22	25-30	96	99	78	68	47	47	47	2	48	14	53	28	38	42	48	PL	PLA
DK 55	30	40	112	121	99	85	55	55	58	2	55	16	62	38	42	48	55	PL	PLA
DK 60	37-45	50-60	138	138	112	91	68	68	68	2	60	18	67	42	48	55	60	PL	PLA



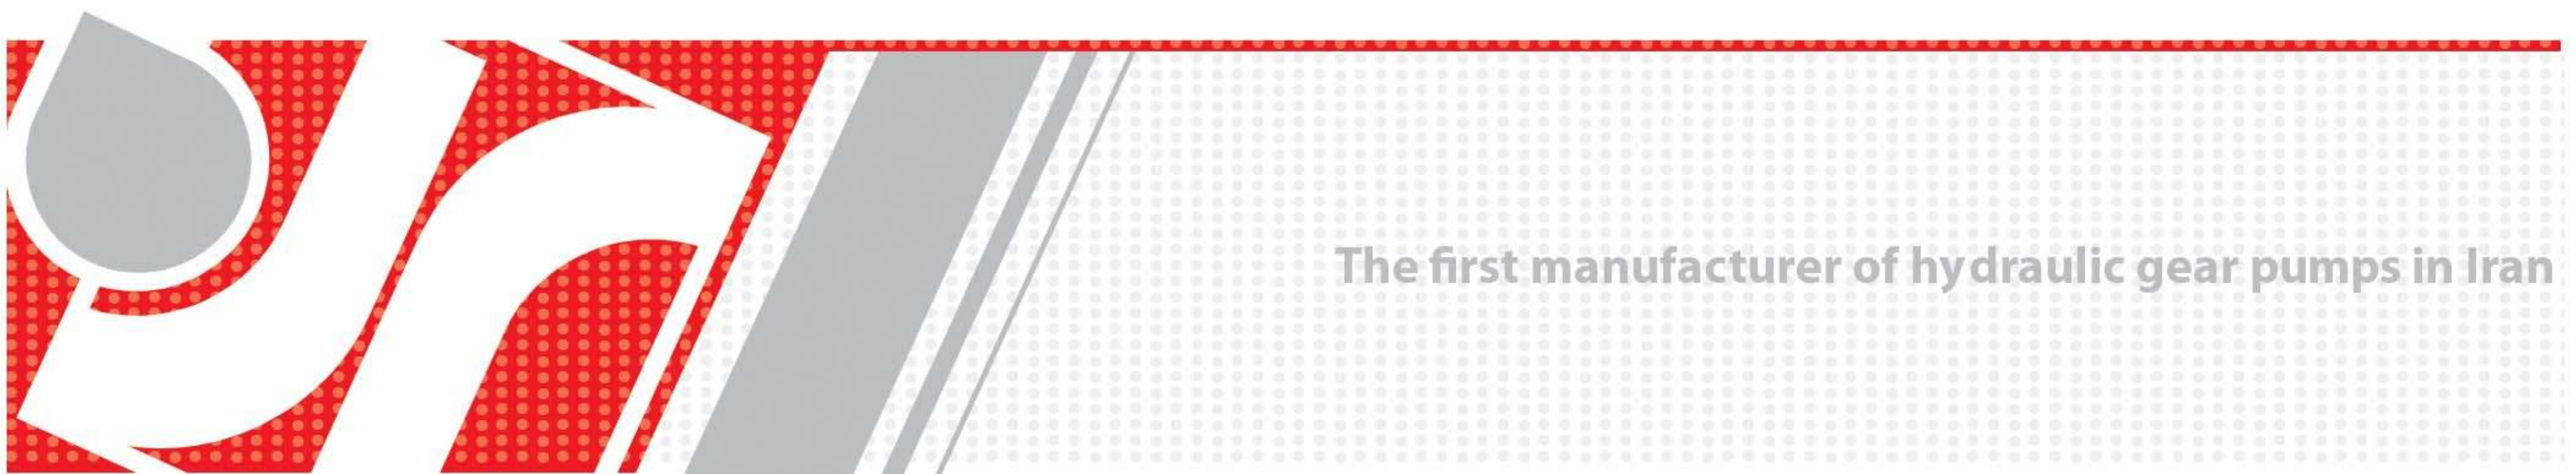

Reference			Motor Side Coupling Gear											
KW	HP	E.MOTOR	CODE	A	A1	B	C	CH	D	E	F	G	T	Z
0.25 / 0.37	0.33 / 0.5	71	DK 14	50	40	32	28	-	-	24	24	2	-	20
0.25 / 0.37	0.33 / 0.5	71	DK 1411	50	40	32	28	4	11	24	24	2	13	20
0.25 / 0.37	0.33 / 0.5	71	DK 1414	50	40	32	28	5	14	24	24	2	16.5	20
0.55 / 1.6	0.75 / 2	80 / 90	DK 24	58	53	44	37	-	-	28	36	2	-	27
0.55 / 1.6	0.75 / 2	80 / 90	DK 2411	58	53	44	37	4	11	28	36	2	13	27
0.55 / 1.6	0.75 / 2	80 / 90	DK 2414	58	53	44	37	5	14	28	36	2	16.5	27
0.55 / 1.6	0.75 / 2	80 / 90	DK 2419	58	53	44	37	6	19	28	36	2	22	27
0.55 / 1.6	0.75 / 2	80 / 90	DK 2424	58	53	44	37	8	24	28	36	2	28	27
2.2 / 4	3 / 5.5	110/112	DK 28	82	67	56.5	38	-	-	40	44	2	-	36
2.2 / 4	3 / 5.5	110/112	DK 2811	82	67	56.5	38	4	11	40	44	2	13	36
2.2 / 4	3 / 5.5	110/112	DK 2814	82	67	56.5	38	5	14	40	44	2	16.5	36
2.2 / 4	3 / 5.5	110/112	DK 2819	82	67	56.5	38	6	19	40	44	2	22	36
2.2 / 4	3 / 5.5	110/112	DK 2824	82	67	56.5	38	8	24	40	44	2	28	36
2.2 / 4	3 / 5.5	110/112	DK 2828	82	67	56.5	38	8	28	40	44	2	32	36
2.2 / 4	3 / 5.5	132	DK 32	82	76	59	43	-	-	40	50	2	-	38
2.2 / 4	3 / 5.5	132	DK 3214	82	76	59	43	5	14	40	50	2	16.5	38
2.2 / 4	3 / 5.5	132	DK 3219	82	76	59	43	6	19	40	50	2	22	38
2.2 / 4	3 / 5.5	132	DK 3224	82	76	59	43	8	24	40	50	2	28	38
2.2 / 4	3 / 5.5	132	DK 3228	82	76	59	43	8	28	40	50	2	32	38
5.5 / 7.5	7.5 / 10	132	DK 38	86	84	68	47	-	-	42	58	2	-	37
5.5 / 7.5	7.5 / 10	132	DK 3819	86	84	68	47	6	19	42	58	2	22	37
5.5 / 7.5	7.5 / 10	132	DK 3824	86	84	68	47	8	24	42	58	2	28	37
5.5 / 7.5	7.5 / 10	132	DK 3828	86	84	68	47	8	28	42	58	2	32	37
5.5 / 7.5	7.5 / 10	132	DK 3838	86	84	68	47	10	38	42	58	2	43	37
11 / 15	15 / 20	160	DK 42	86	88	72	52	-	-	42	60	2	-	39
11 / 15	15 / 20	160	DK 4219	86	88	72	52	6	19	42	60	2	22	39
11 / 15	15 / 20	160	DK 4224	86	88	72	52	8	24	42	60	2	28	39
11 / 15	15 / 20	160	DK 4228	86	88	72	52	8	28	42	60	2	32	39
11 / 15	15 / 20	160	DK 4238	86	88	72	52	10	38	42	60	2	43	39
11 / 15	15 / 20	160	DK 4242	86	88	72	52	12	42	42	60	2	47	39
18.5 / 22	25 / 30	180	DK 48	96	99	78	48	-	-	47	68	2	-	42
18.5 / 22	25 / 30	180	DK 4819	96	99	78	48	6	19	47	68	2	21	42
18.5 / 22	25 / 30	180	DK 4824	96	99	78	48	8	24	47	68	2	28	42
18.5 / 22	25 / 30	180	DK 4828	96	99	78	48	8	28	47	68	2	32	42
18.5 / 22	25 / 30	180	DK 4838	96	99	78	48	10	38	47	68	2	43	42
18.5 / 22	25 / 30	180	DK 4842	96	99	78	48	12	42	47	68	2	47	42
18.5 / 22	25 / 30	180	DK 4848	96	99	78	48	14	48	47	68	2	53	42
30	40	200	DK 55	112	121	99	58	-	-	55	85	2	-	48
30	40	200	DK 5524	112	121	99	58	8	24	55	85	2	28	48
30	40	200	DK 5528	112	121	99	58	8	28	55	85	2	32	48
30	40	200	DK 5538	112	121	99	58	10	38	55	85	2	43	48
30	40	200	DK 5542	112	121	99	58	12	42	55	85	2	47	48
30	40	200	DK 5548	112	121	99	58	14	48	55	85	2	53	48
30	40	200	DK 5555	112	121	99	58	16	55	55	85	2	62	48
37 / 45	50 / 60	225	DK 60	138	138	112	68	-	-	68	91	2	-	55
37 / 45	50 / 60	225	DK 6042	138	138	112	68	12	42	68	91	2	47	55
37 / 45	50 / 60	225	DK 6048	138	138	112	68	14	48	68	91	2	53	55
37 / 45	50 / 60	225	DK 6055	138	138	112	68	16	55	68	91	2	62	55
37 / 45	50 / 60	225	DK 6060	138	138	112	68	18	60	68	91	2	67	55

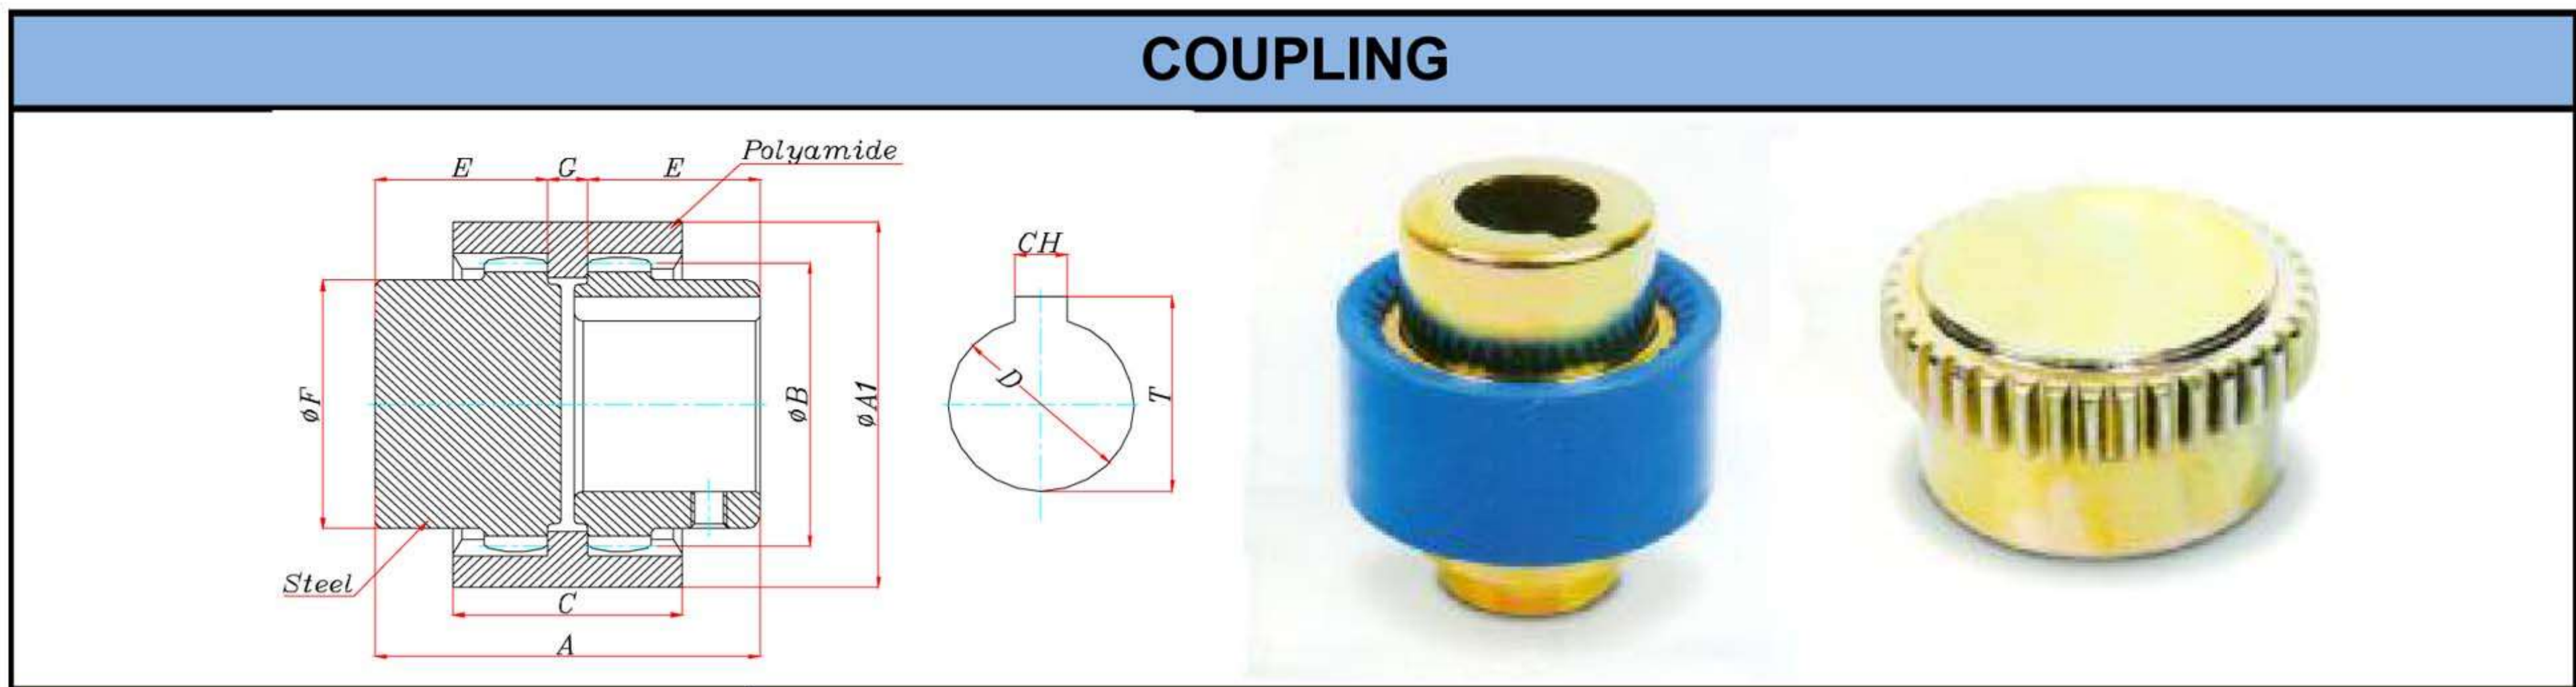

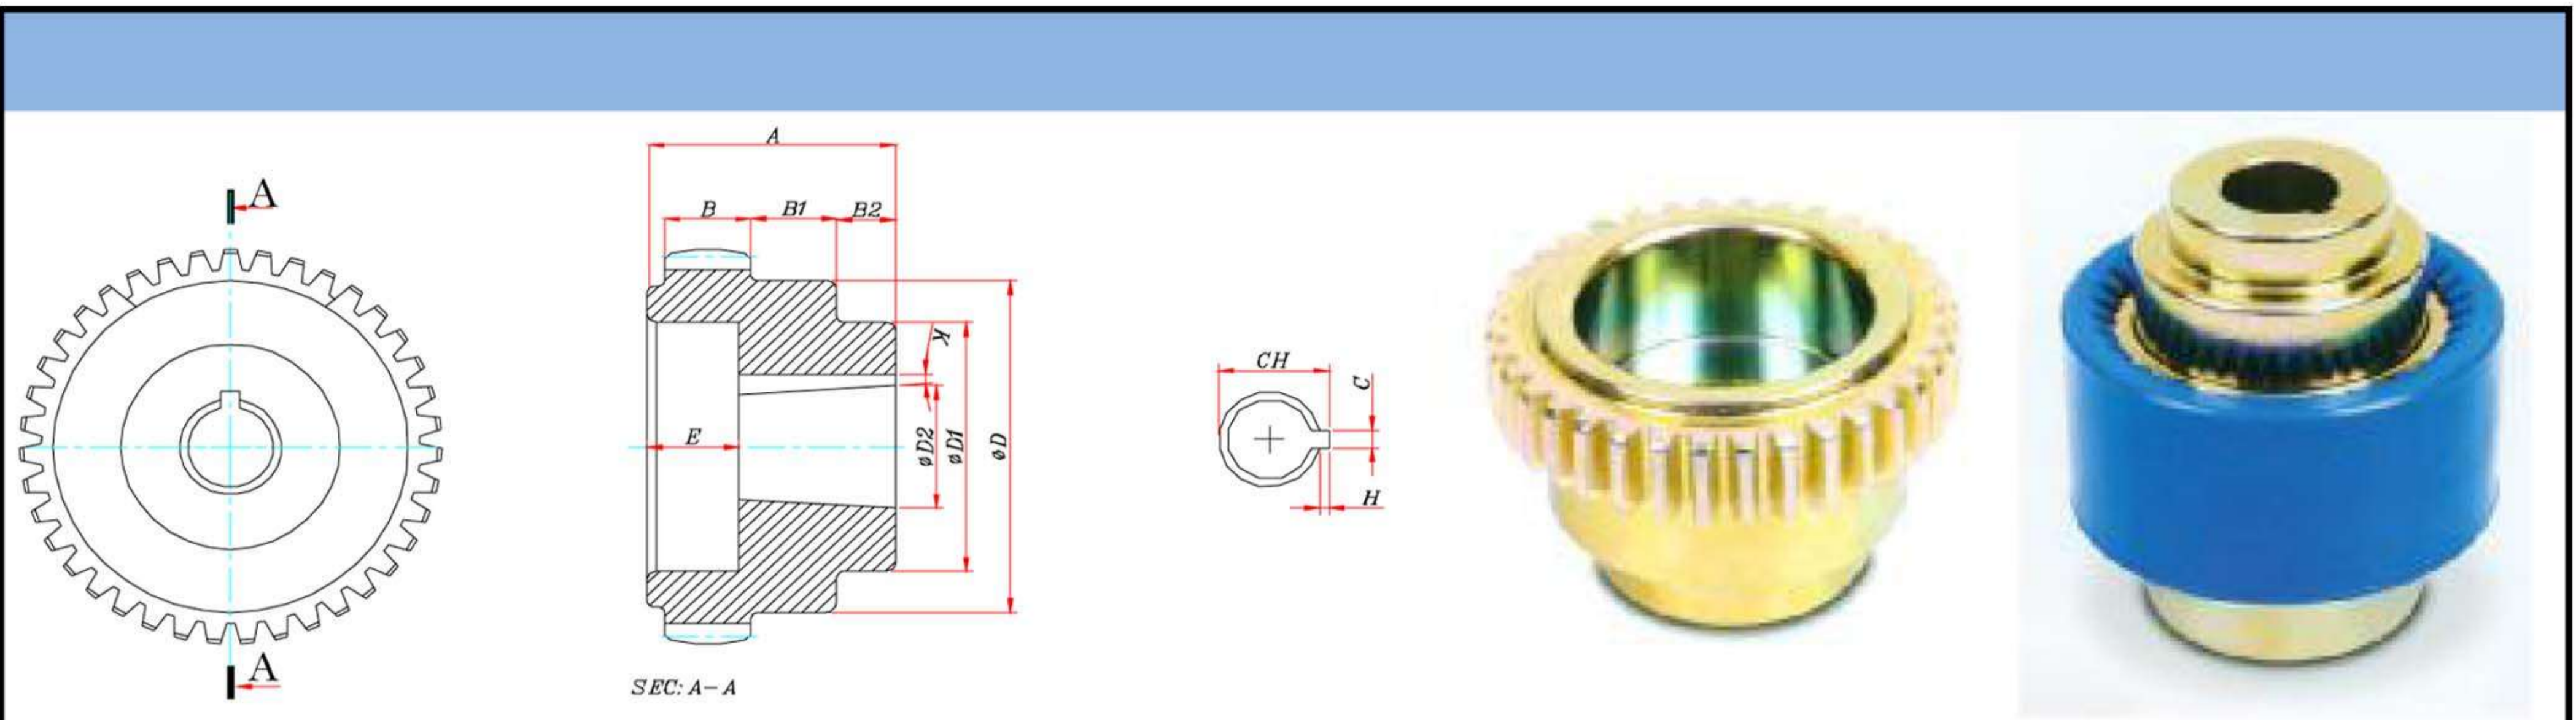
Pump Side Coupling Gear

CODE	A	B	B1	B2	C	CH	D	D1	D2	E	H	K	Z
DK 14LOE	24	8	-	-	2.5	11	24	-	9.5	12	1.5	1/8	20
DK 24LOE	28	9.6	11.5	5	2.5	11	36	23	9.5	15.5	1.5	1/8	27
DK 24LE	28	9.6	-	-	3.2	18.5	36	-	17.2	-	1.3	1/8	27
DK 28LOE	40	12.15	15	11	2.5	11	43.7	31	9.5	27.5	1.5	1/8	36
DK 28LE	40	12.15	-	-	3.2	18.5	43.7	-	17.2	-	1.3	1/8	36
DK 28LC	40	12.15	15	11	4	17.6	43.7	31	16	-	1.8	-	36
DK 32LE	40	13	-	-	4	18.5	50	-	17.2	-	1.3	1/8	38
DK 38 LE	42	15	-	-	3.2	18.5	58	-	17.2	-	1.3	1/8	37
DK 38 LC	42	15	-	-	4	17.6	58	-	16	-	1.8	-	37
DK 42 LE	42	14.3	14	10	3.2	18.5	60	35	17.2	20	1.3	1/8	39
DK 42 LC	42	14.3	14	10	4	17.6	60	35	16	15.5	1.8	-	39
DK 42 LAE	42	14.3	14	10	4	24.2	60	45	22.2	15.5	3.8	1/8	39
DK 42 LAC	42	14.3	14	10	6	26.7	60	45	24	-	3	0	39
DK 42 LAC 22.2	42	14.3	14	10	6	25	60	45	22.2	-	3.2	0	39

